



Disegni Tecnici


Posa in luce

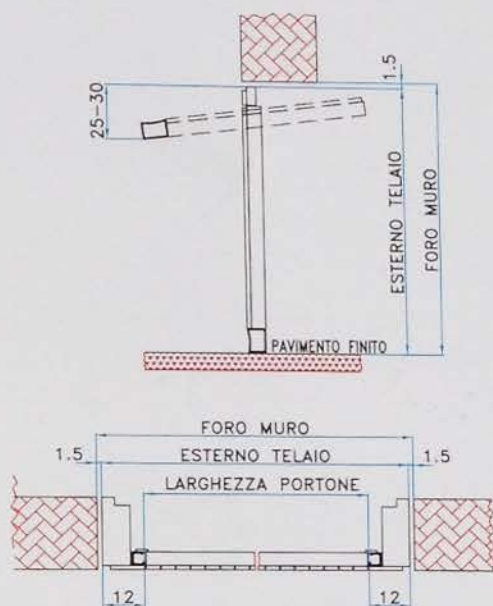


Posa in oltreluce con mazzetta

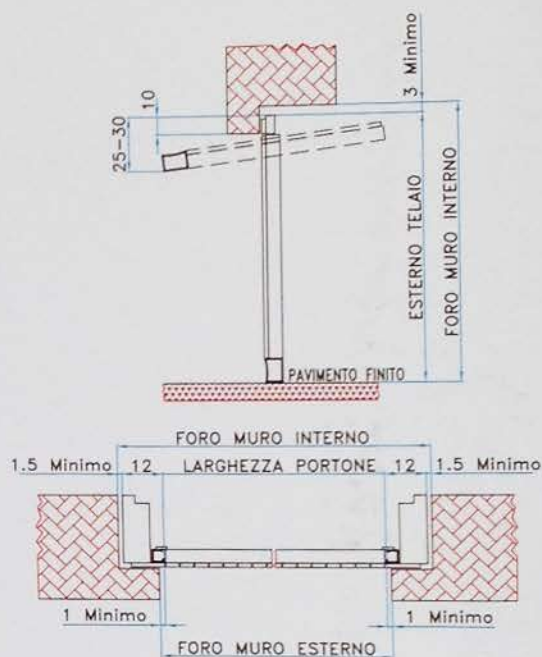

Posa in oltreluce

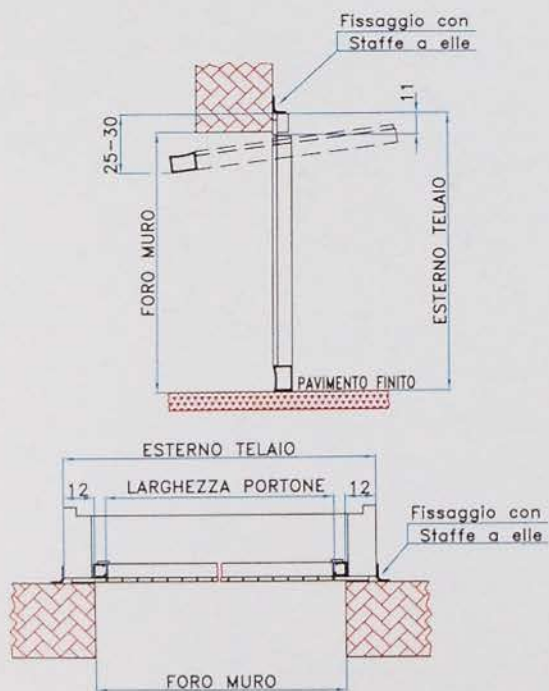

Ingombri indicativi di traiettorie d'apertura

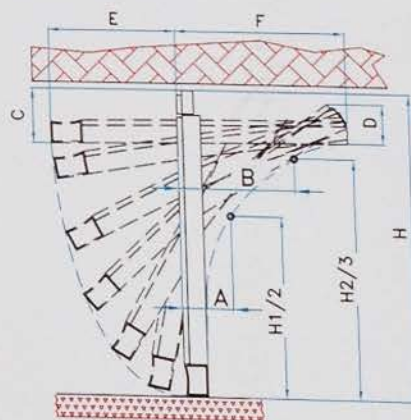

Versione debordante

H	A	H 1/2	B	H 2/3	C	D	E	F
2000	250	1000	455	1330	250	160	700	1230
2100	248	1050	460	1400	250	160	740	1300
2200	246	1100	465	1466	250	160	770	1360
2300	244	1150	470	1533	250	160	800	1430
2400	242	1200	475	1600	250	160	840	1500
2500	240	1250	480	1666	250	160	870	1560
2600	238	1300	485	1733	250	160	900	1630
2700	236	1350	490	1800	280	160	940	1700
2800	234	1400	495	1866	280	160	970	1760
2900	232	1450	500	1933	300	160	1000	1830
3000	230	1500	505	2000	300	160	1040	1900